




## Portable Stand for Leica DMS 300/1000

Tragbares Stativ für Leica DMS 300/1000

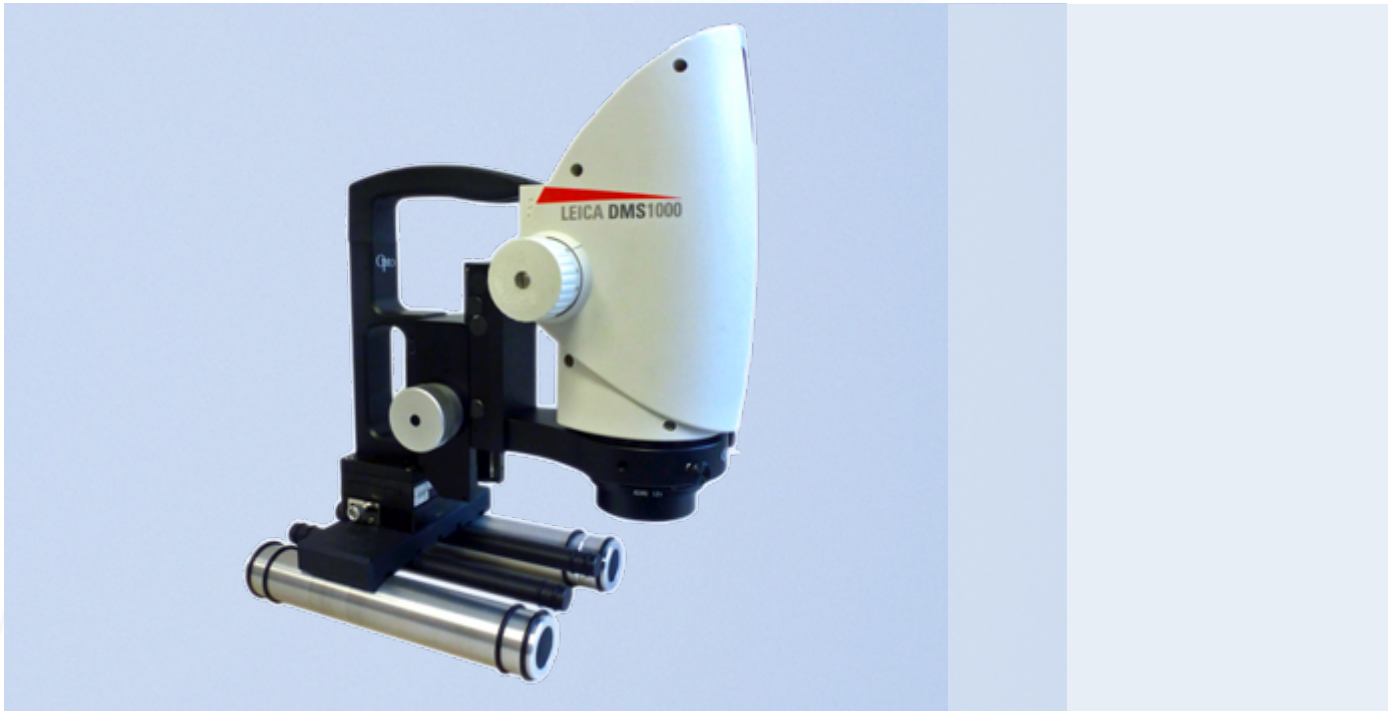

### Technical Features

Article: basic unit 043-112414-50-V2

- Usable for roller inspection starting with a diameter of 60mm or flat samples
- Sensitive positioning of the microscope by x/y stages,  
travel: 25mm; spindle pitch: 0.5mm; scale division: 10µm; adjustment sensitivity: 5µm
- Z-axis movement with coarse/fine focusing drive,  
travel range, coarse focus: 80mm (+42/-38mm) ; travel in fine gear: 0.24mm; fine drive sensitivity 2.9µm
- Carrying handle in ergonomic design
- Usable objective lenses M-series: 0.5x / 0.63x / 0.8x / 1.0x / 1.25x / 1.6x / 2.0x
- Usable objective lenses Z-series: 0.5x / 0.8x / 1.0x / 2.0x
- Optional LED ringlight illumination only by using regular Schott or Photonics products
- Optional LED spotlight illumination with Opto Jointed Coupler and LED Spots from Schott or Photonics
- Dimensions approx. 258 x 150 x 213mm (basic unit)
- Weight approx. 4.5kg

